



Secure code

Use limited-size read

address sanitizer


Check return codes

What do you want to be called?

%f %s %g

read(0, buffer, len)

// buffer is tainted 

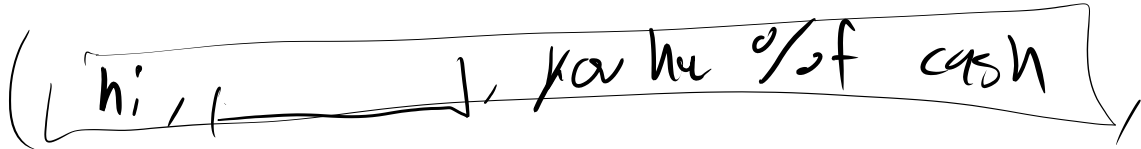printf (hi, , ballance)

d/.../.../.../.../lat/lon/grades.csv

/bisTemp/lon/

assert (bool)

else {

assert(0)

}

Switch {

case


case

case

default: assert(0)

Should I use C?

constrained — embedded system,

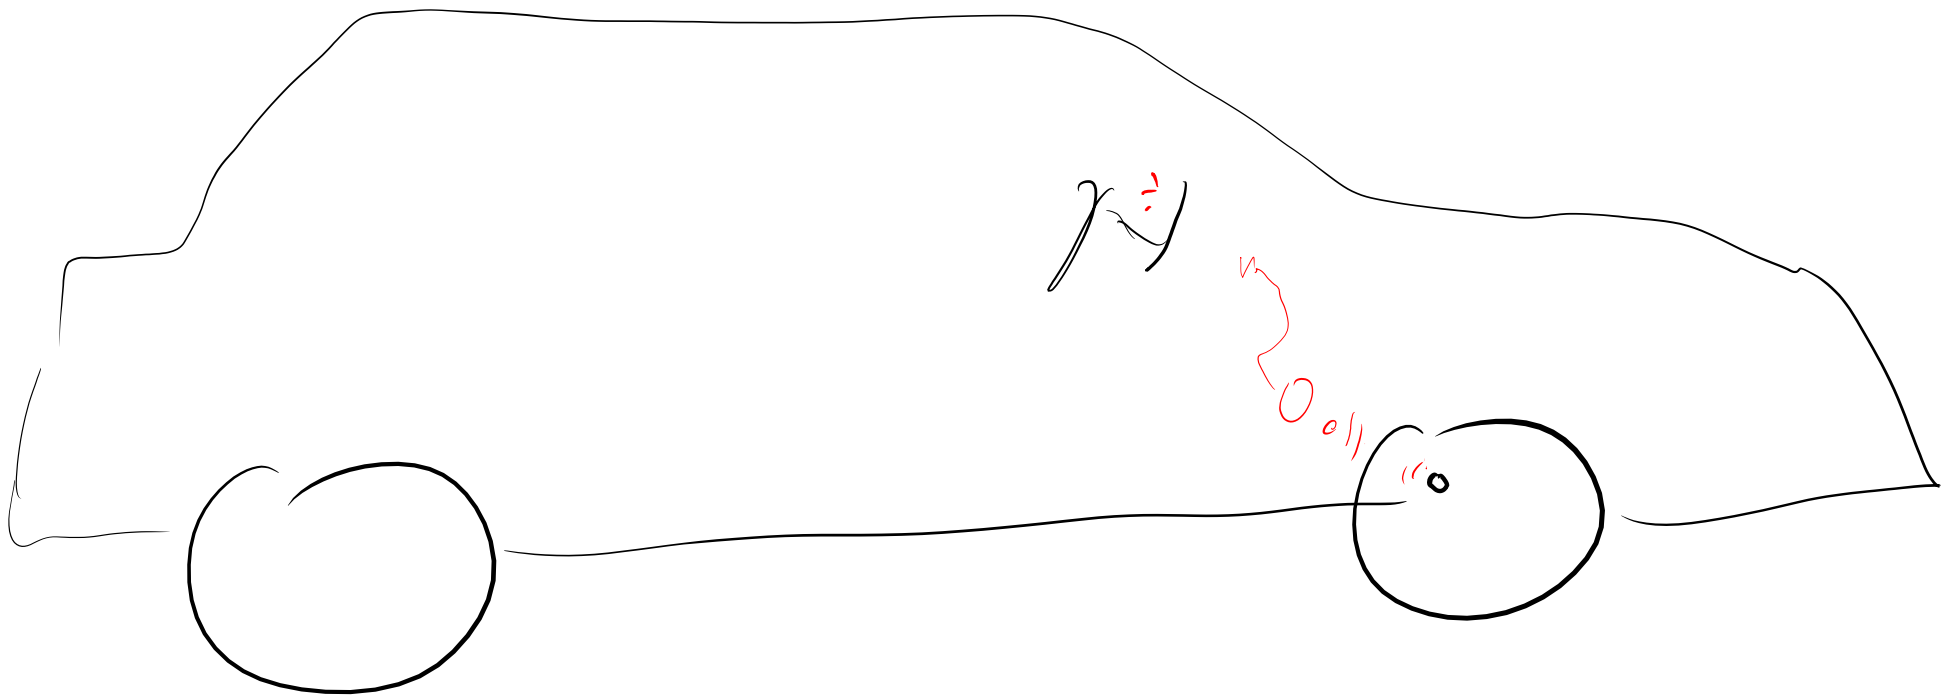

end task

